

Adjust IF transformers for peak at 456 KC.

Adjust A band Trimmers for maximum output at 1400 KC.

Adjust A band Padder for maximum output at 600 KC.

Adjust B band Oscillator Trimmer for maximum output at 4.3 MC.



Adjust B band Padder for maximum output at 1.8 MC.

Adjust B band RF Trimmer for maximum output at 5.3 MC.

Adjust C band Trimmers for maximum output at 13 MC.

When aligning bands a dummy antenna of 10 MMFD and 200 ohms in parallel should be connected in series with the signal generator output.

Remove Link when
Using Doublet Antenna

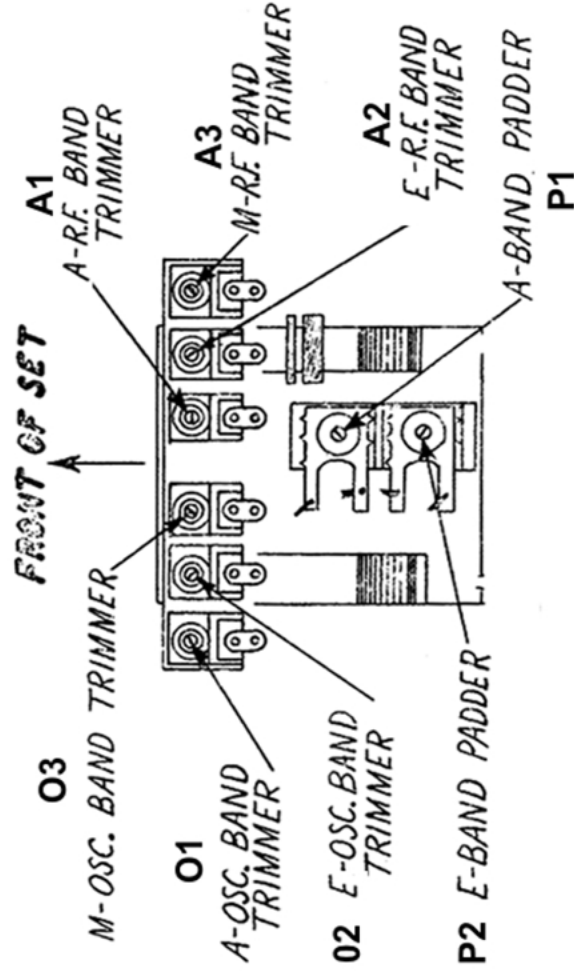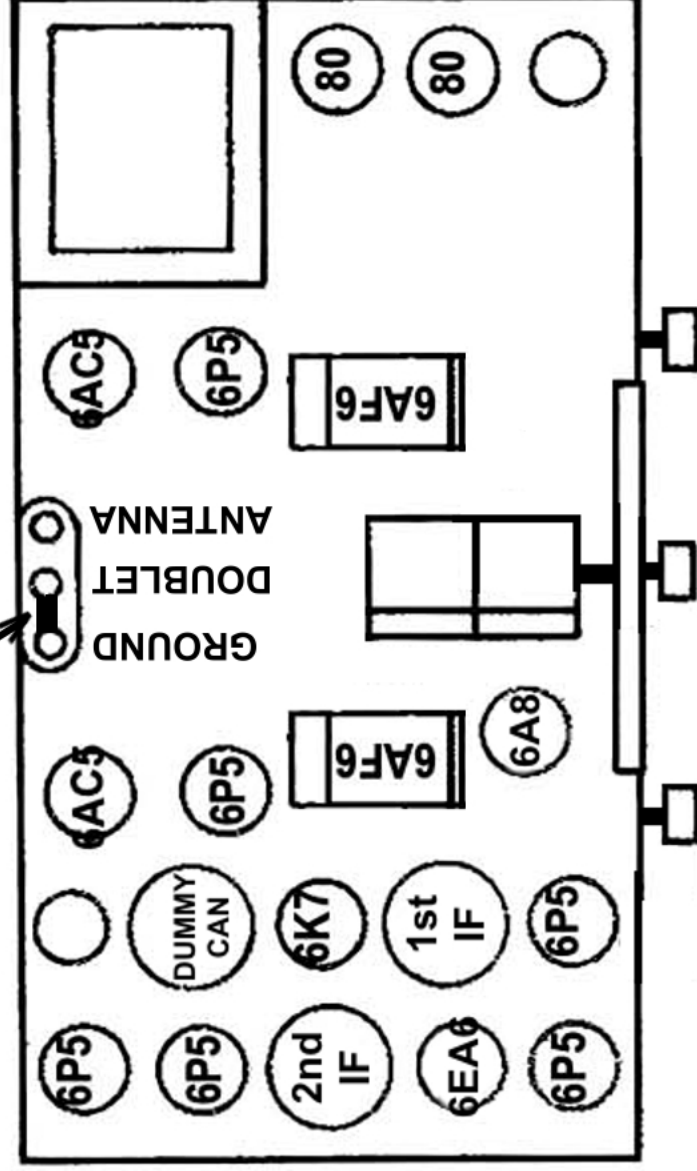

1939 MIDWEST
SPECIAL 15 TUBE

Drawn by M. Simpson
February, 2021